

1200W Modified Sine Wave DC - AC Power Inverter

Inverter Expert **CAR Series - CAR1.2K**



FEATURES: ■

I/P voltage: 12V DC or 24V DC or 48V DC ◀

Output voltage: 100/110/120V AC or 220/230/240V AC ◀

Output frequency: 50/60Hz ± 3 ◀

I/P protections: Bat.Low alarm; Bat.Low shutdown; Over voltage; Polarity reverse ◀

O/P protections: Over load; Short circuit; Earth fault; Over temperature; Soft start ◀

Output waveform: Modified Sine Wave ◀

Design: High frequency design ◀

Topology: Microprocessor ◀


No load current draw: Low power consumption (standby) ◀

In front panel: With power ON/OFF switch and LED indicator ◀

ON/OFF remote control: optional ◀

Cooling fan: Load controlled or temperature controlled cooling fan (optional) ◀

Output Receptacle (optional)



■ SPECIFICATION:





Model	CAR1.2K-121	CAR1.2K-122	CAR1.2K-241	CAR1.2K-242	CAR1.2K-481	CAR1.2K-482	
Output	AC Voltage	110V	230V	110V	230V	110V	230V
	AC Voltage Range	100~120V AC	220~240V AC	100~120V AC	220~240V AC	100~120V AC	220~240V AC
	AC Regulation	± 10%					
	Rated Power	1200W					
	Peak Power	2400W(few seconds)					
	Waveform	Modified Sine Wave					
	Frequency	50/60Hz ± 3					
	USB Port	5V 2.1A					
	LED Indicator	Green for power on, Red for power failure / protection status					
Input	DC Current	120A	60A	30A			
	No Load Current Draw	0.8A	0.8A	0.8A			
	DC Voltage	12V	24V	48V			
	Voltage Range	9.5~16V DC	19~32V DC	38~64V DC			
	DC Connector	BVR10 battery clip * 1ea	BVR6 battery clip * 1ea	BVR4 battery clip * 1ea			
	Protection	Efficiency	≥ 90%				
Low Voltage Alarm		11 ± 0.5V DC	22 ± 1V DC	44 ± 1V DC			
Low Voltage Shutdown		9.5 ± 0.5V DC	19 ± 1V DC	38 ± 1V DC			
Reset Voltage after L. V. S		11.5V~12V DC	23~24V DC	46~48V DC			
Overload		Shut off o/p, re-power to recover					
Over Voltage		15 ± 0.5V DC	30 ± 1V DC	60 ± 2V DC			
Over Temperature		45 ± 5°C/113 ± 9 °F					
Output Short-circuit		Shut off o/p, when output is short circuit					
Reverse Polarity		By fuse open					
Replaceable Fuse		40A*4	20A*4	10A*4			
Soft Start		Yes, 3~5's					
Environment	Working Temp.	0~30°C @ 100% load; 40°C @ 50% load					
	Working Humidity	20%~90% RH non-condensing					
	Storage Temp., Humidity	-30~+70°C/-22~+158°F, 10~95%RH					
	Temp. Coefficient	± 0.05%(0~50°C)					
Safety&EMC	Isolation Resistance	I/P-O/P:100M Ohms/500VDC/25°C/70%RH					
	EMI Conduction&Radiation	Compliance to EN55022 class B, 72/245/CEE, 95/54/CE					
	EMS Immunity	Compliance to EN61000-4-2,3					
	LVD	Compliance to EN60950					
	E-mark	E8 10R-02 0633					
Other	Remote Control	optional(switch with 5m wire)					
	MTBF	100khrs min. MIL - HDBK - 217(25 °C)					
	N.W/unit	2480g					
	Dimension(cm)	27.5*20.8*7.7(L*W*H)					
	Packing	Blister card/gift box, 6 units/19.5Kg/Ctn(50*34*44.5cm)					
	Output Receptacle	A, B, C, D, E, F, G, H, I, J, K, L, M, N(optional)					
Applications	Home appliance, power tools, office and portable equipment and vehicle...etc.						

1200W Modified Sine Wave DC - AC Power Inverter

Inverter Expert **CAR Series - CAR1.2K**

MECHANICAL SPECIFICATION:

Unit: mm

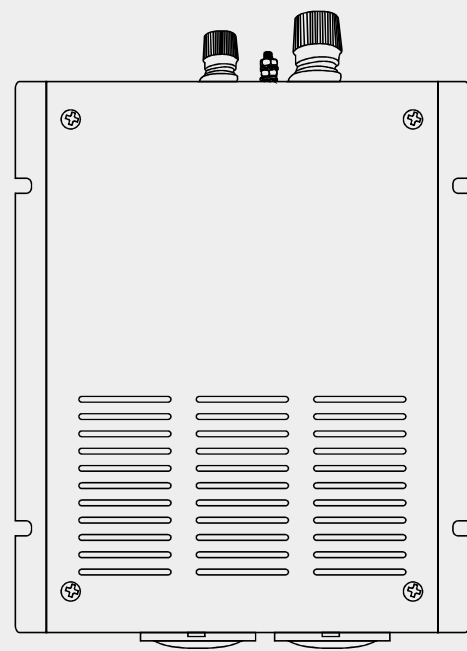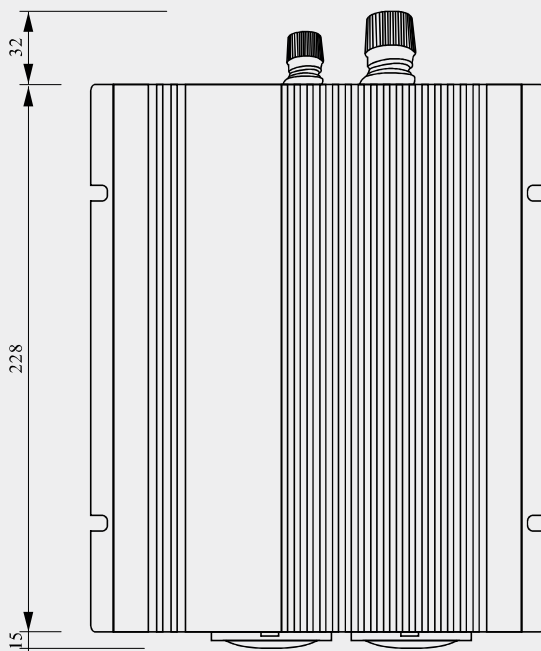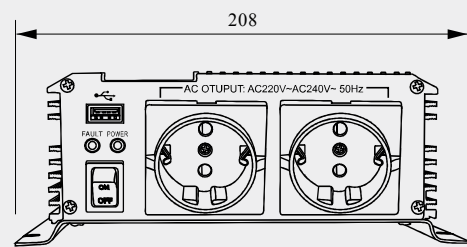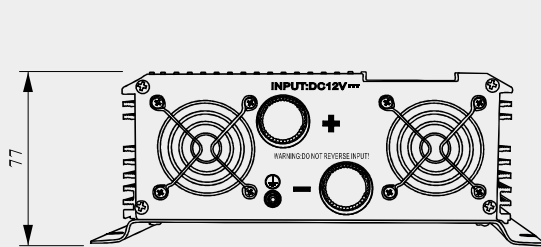

Output Receptacle (optional)

